

THE COMMISSIONER OF PATENTS AND TRADEMARKS, Washington, D.C. 20231

Enclosed for filing is the patent application of Inventor(s):
KARL J. WOOD ET AL

For: GRAPHIC IMAGE TEXTURE GENERATION

ENCLOSED ARE:

- ☒ Appointment of Associates;
☒ Information Disclosure Statement, Form PTO-1449 and copies of documents listed therein;
☒ Preliminary Amendment;
☒ Specification (16 Pages of Specification, Claims, & Abstract);
☒ Declaration and Power of Attorney:
 (2 Pages of a [] fully executed [X] unsigned Declaration);
☒ Drawings (4 sheets of [] informal [X] formal sheets);
☒ Certified copy of GREAT BRITAIN application Serial No. 9715005.6;
☒ Authorization Pursuant to 37 CFR §1.136(a)(3)
☐ Other: ;
☐ Assignment to

FEE COMPUTATION

CLAIMS AS FILED				
FOR	NUMBER FILED	NUMBER EXTRA	RATE	BASIC FEE - \$790.00
Total Claims	11 - 20 =	0	X \$22 =	0.00
Independent Claims	1 - 3 =	0	X \$82 =	0.00
Multiple Dependent Claims, if any			\$270 =	0.00
TOTAL FILING FEE			=	\$790.00

Please charge Deposit Account No. 14-1270 in the amount of the total filing fee indicated above, plus any deficiencies. The Commissioner is also hereby authorized to charge any other fees which may be required, except the issue fee, or credit any overpayment to Account No. 14-1270.

[] Amend the specification by inserting before the first line as a centered heading --Cross Reference to Related Applications--; and insert below that as a new paragraph --This is a continuation-in-part of application Serial No. . . . , filed . . . , which is herein incorporated by reference--.


CERTIFICATE OF EXPRESS MAILINGExpress Mail Mailing Label No. EM402815242Date of Deposit 02/17/98

I hereby certify that this paper and/or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.

G. Lamprecht

Typed Name

Signature



Gregory L. Thorne, Reg. 39,398
 Attorney
 (914) 333-9665
 U.S. Philips Corporation
 580 White Plains Road
 Tarrytown, New York 10591
 S:\TH\MY16THD0.S00

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of

Atty. Docket

KARL J. WOOD ET AL

PHB 34,169

Filed: CONCURRENTLY

GRAPHIC IMAGE TEXTURE GENERATION

Honorable Commissioner of Patents and Trademarks
Washington, D.C. 20231

APPOINTMENT OF ASSOCIATES

Sir:

The undersigned Attorney of Record hereby revokes all prior appointments (if any) of Associate Attorney(s) or Agent(s) in the above-captioned case and appoints:

GREGORY L. THORNE

(Registration No. 39,398)

c/o U.S. PHILIPS CORPORATION, Intellectual Property
Department, 580 White Plains Road, Tarrytown, New York
10591, his Associate Attorney(s)/Agent(s) with all the usual
powers to prosecute the above-identified application and any
division or continuation thereof, to make alterations and
amendments therein, and to transact all business in the
Patent and Trademark Office connected therewith.

ALL CORRESPONDENCE CONCERNING THIS APPLICATION AND
THE LETTERS PATENT WHEN GRANTED SHOULD BE ADDRESSED TO THE
UNDERSIGNED ATTORNEY OF RECORD.

Respectfully,


Algy Tamoshunas, Reg. 27,677
Attorney of Record

Dated at Tarrytown, New York
on July 16, 1998.

S:\TH\MY16THE0.S00

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of

Atty. Docket

KARL J. WOOD ET AL

PHB 34,169

Filed: CONCURRENTLY

GRAPHIC IMAGE TEXTURE GENERATION

Honorable Commissioner of Patents and Trademarks
Washington, D.C. 20231

PRELIMINARY AMENDMENT

Sir:

Prior to calculation of the filing fee and examination, please
amend the above-identified application as follows:

IN THE SPECIFICATION

Page 1, before line 1, insert the following heading:

--BACKGROUND OF THE INVENTION--;

line 22, change "Whilst" to --While--;

Page 2, line 1, change "standardised" to --standardized--;

line 5, change "standardisation" to --standardization--;

line 8, change "standardisation" to --standardization--;

line 21, change "standardisation" to --standardization--;

line 24, change "drive: operationally" to

--drive. Operationally,--;

line 27, change "Whilst" to --While--;

line 30, change "standardised" to --standardized--;

Page 3, line 4, change "whilst" to --while--;

before line 8, insert the following heading:

--SUMMARY OF THE INVENTION--;

line 13, change "standardised" to --standardized--;

line 14, change "standardised" to --standardized--;

line 16, change "standardised" (all occurrences) to
--standardized--;

line 21, change "programme" to --program--;

line 22, change "standardised" to --standardized--;

line 23, change "standardised" to --standardized--;

Page 4, line 6, change "parameterisation" to

--parameterization--;

line 10, change "programme" to --program--;

line 11, change "standardised" to --standardized--;

Page 5, line 13, change "standardised" to --standardized--;

line 16, change "standardisation" to --standardization--;

before line 24, insert the following heading:

--BRIEF DESCRIPTION OF THE DRAWINGS--;

Page 6, before line 5, insert the following heading:

--DESCRIPTION OF THE PREFERRED EMBODIMENTS--;

line 8, change "recognised" to --recognized--;

Page 7, line 7, change "specialising" to --specializing--;

line 14, change "paremeterised" to --parameterized--;

Page 9, line 8, change "standardised" to --standardized--;

line 25, change "maximise" to --maximize--;
line 28, change "initialisation" (all occurrences) to
--initialization--;

Page 10, line 12, change "whilst" to --while--;
line 14, change "standardised" to --standardized--;
line 19, change "Whilst" to --While--;
line 20, change "specialised" to --specialized--;

Page 11, line 1, change "standardised" to --standardized--;
line 9, change "onboard" to --on-board--;
line 25, change "without" to --without the--;
line 26, change "cache" to --cache,--;

Page 12, line 7, change "should even" to --in the event that--;
change "prove" to --proves--;
line 8, change "surfaces to be textured (step 518):
for" to --textured surfaces (step 518). For--;
line 9, change "surfaces to be textured may appear as"
to --all textured surfaces may be--;
line 19, change "generalisation" to --generalization--.

IN THE CLAIMS

Please amend the claims as follows:

1. (Amended) Apparatus for texture mapping in a computer graphics system, using a predetermined set of [standardised] standardized

textures, the apparatus having an input to receive data identifying one of the set of [standardised] standardized textures, and means for processing the data to generate output texels of the identified texture[; characterised in that] , wherein each texture of the [standardised] standardized set is a procedural texture, the input identifying data comprises one or a sequence of program commands, the execution of which will result in the generation of a respective procedural texture, with the means for processing data comprising a processor operable to implement all such input program commands or sequences of input [programme] program commands as required to generate the procedural textures of the [standardised] standardized set.

Claim 4, line 3, change "programme" to --program--;
line 4, change "standardised" to --standardized--.

Claim 11, line 3, change "same" to --program commands--.

IN THE ABSTRACT

Page 16, before line 5, delete in its entirety and substitute the following heading: --ABSTRACT OF THE DISCLOSURE--;
line 5, delete "(34)";
line 6, change "standardised" to --standardized--;


line 7, change "standardised" to --standardized--;
delete "(34)";
line 8, delete "(44)";
line 10, delete "(4)";
line 12, change "programme" to --program--;
line 13, change "standardised" to --standardized--;
last line, delete "[Figure 3]".

REMARKS

This amendment is submitted to place the application in proper U.S. format. Entry is respectfully solicited.

Respectfully submitted,

By


Gregory L. Thorne, Reg. 39,398
Attorney
(914) 333-9665

DESCRIPTION

GRAPHIC IMAGE TEXTURE GENERATION

5 The present invention relates to image processing and in particular to means for texture mapping in the rendering of two dimensional pixel images, where those images are made up of a number of polygons defined in three-dimensional (object) space and projected into two-dimensional (screen) space, and pixel texture values (texels) from a two dimensional texture map are mapped onto pixel positions within the projected two dimensional polygons.

10 The process of texture mapping is well known, in essence comprising the step of wrapping a two-dimensional picture or texture over a geometric surface in order to give a greater degree of realism and often a reduction in the geometric complexity of the object. Basic texture mapping techniques are described for example in "Computer Graphics: Principles and Practice" by Foley, van Dam, Feiner and Hughes, published by Addison Wesley 1990, ISBN 0-201-12110-7, at pages 741-744.

15 An increasingly common use for texture mapping of polygons is in the generation of so-called virtual environments which a user is then enabled to navigate or even interact with, for example in a flight simulator or virtual reality and games applications. Whilst generally hosted on a single system, these generated virtual environments are not limited to a single user and, with the increase in communications via local or large area data networks, a single virtual environment may be visited simultaneously by users from different countries or continents. As with all such data networks, however, there is a limit to the available bandwidth which raises the need to find a balance between the frequency at which updated images of the virtual environment may be transmitted across the network and the level of detail that may be represented.

20 The problem may be reduced when the format of data storage and

representation for such virtual environments is at least partially standardised, allowing for greater interchange between systems of different manufacturers and simplification of standard commands, as well as a reduction in the necessity for individually tailored translation utilities. With at least partial
5 standardisation, the necessary configuration of a browser for accessing such data, whether in a hardware or software implementation or a mixture of the two, becomes simpler.

A notable example of standardisation in the field of data defining virtual environments is the so-called Virtual Reality Modelling Language (VRML) as described, for example, in the VRML standard, version 2.0, issued as ISO/IEC
10 WD14772 on 4th August 1996. VRML is a file format for describing interactive three-dimensional objects and worlds to be experienced on the Internet/World Wide Web and it is generally analogous to the way HTML (HyperText Markup Language) is used to describe documents for transmission over the Internet.
15 In order to simplify the specification of how objects appear within a virtual environment, it is a known technique in formats such as VRML to restrict such objects to constructions from a limited set of "building blocks" such as rods, cones and cubes, which may be simply specified in relatively few parameters.

In an Internet White Paper issued by S3 Incorporated in January 1997,
20 entitled "Delivering Compelling 3D Content on the Web" it was proposed to extend this standardisation to textures and, in order to reduce the volume of data transmitted per scene, to provide users with a local library of the standard textures in the form of a collection of texture maps to be held on the users hard drive: operationally it was suggested that the users system would first check
25 the local hard drive for a specified texture before calling for it to be transmitted from the virtual environment host.

Whilst maintaining a local store of textures does greatly reduce the volume of data sent via data network, it also generates its own problems. Apart from the expected difficulties of persuading different system
30 manufacturers to agree on a standardised texture set, the principle problem is the amount of space on a users hard disk that will be taken up if the set

contains many different textures. This problem is compounded by the need to hold each texture at at least two different resolutions to enable interpolation and extrapolation techniques to be used to create textures at desired resolution levels. Furthermore, whilst the volume of data network traffic is reduced, there is an increase within the users system, between a graphics engine and the hard disk.

It is therefore an object of the present invention to reduce the volume of data required to be stored by a users system without generating a corresponding increase in external data traffic.

In accordance with a first aspect of the present invention there is provided an apparatus for texture mapping in a computer graphics system, using a predetermined set of standardised textures, the apparatus having an input to receive data identifying one of the set of standardised textures, and means for processing the data to generate output texels of the identified texture; characterised in that each texture of the standardised set is a procedural texture, the input identifying data comprises one or a sequence of program commands the execution of which will result in the generation of a respective procedural texture, with the means for processing data comprising a processor operable to implement all such input program commands or sequences of input programme commands as required to generate the procedural textures of the standardised set.

By using a standardised set of procedural textures (texture patterns which may be generated from a specifying descriptor or algorithm, such as chess boards, woodgrain or marbling), the need to give over areas of local storage to texture maps is avoided as the texture can be generated as required. Suitably, the apparatus has at least one further input for one or more predetermined classes of numerical parameter, with the processor being arranged to generate procedural textures with reference to the or each numerical parameter value received. Such a predetermined class of numerical parameter may suitably comprise a scale factor, or the scale factor may be

input in a different form, with the processor then being arranged to generate a procedural texture at a resolution determined by a received scale factor. In terms of a two-dimensional image composed from polygons projected from three-dimensional object space, this scale factor will directly relate the depth and orientation of the polygon surface to be textured with the texture resolution to be applied. With such parameterisation of the predetermined procedural texture set, the requirement to specify texture at different levels of resolution is avoided, further reducing the volume of data involved.

In a preferred embodiment, the processor is operable to implement only such input program commands or sequences of input programme commands as required to generate those procedural textures of the standardised set. This places a finite limit on the required capability of the processor leading to faster operation and allowing the apparatus to be implemented as a single semiconductor chip.

In a modified embodiment, the apparatus may further comprise a cache memory coupled with the processor, with the processor being configured to generate said procedural textures as texture maps within said cache. Such an embodiment suitably further comprises an input to receive a scale factor, and an interpolator to generate output texels from texture map entries in the cache at a resolution determined by the received scale factor. As with the first embodiment, this modified embodiment may suitably be provided on a semiconductor chip, with the processor, cache and interpolator on a common substrate. Although not as flexible or fast as the direct texel generation of the first embodiment, this modified embodiment with cache is substantially faster than the prior art technique of storing the predetermined textures as a series of texture maps on a users hard disk and then reading the required texel values.

Also in accordance with the present invention there is provided a computer graphics system including either the first or modified embodiments of texture mapping apparatus described above, together with a source of three-dimensional polygon data, a geometry processor coupled to receive said

5 polygon data and arranged to generate a two-dimensional representation of said polygons, a source of program commands coupled to the input of the texture mapping apparatus and specifying textures to be applied to respective ones of said polygons, and rendering means coupled to receive the outputs of the geometry processor and texture mapping apparatus and arranged to generate an output image of said polygons with texture applied.

10 In such a computer graphics system, the sources of polygon data and program commands may comprise an interface to a data network (such as the Internet) to which are coupled remote sources of such polygon data and program commands, the interface being coupled with a memory holding a store of network addresses for such remote sources and being operable to format and transmit messages to such addresses calling for the polygon data and program commands. In such an arrangement, the use of a standardised set of procedural textures provides a notable speed improvement due to the reduced volume of data transmitted in comparison with a full texture map: due to the standardisation of the set, only a short identifier may be required in the request for texture, and its transmitted form as a sequence of program commands will be of smaller volume than sending a full texture map in encoded form. In this networked embodiment, for reasons of flexibility, the program commands are liable to be transmitted over the network in a virtual machine code and the system would accordingly further comprise means for conversion of the same to a local machine code supported by the processor.

25 Preferred embodiments of the present invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

Figure 1 is a block schematic diagram of an image processing system embodying the present invention;

30 Figure 2 is a simplified flow chart illustrating data acquisition procedure of the system of Figure 1;

Figures 3 and 4 represent two different configurations of texture data

processing circuit for use in the system of Figure 1; and

Figure 5 is a flow chart illustrating implementation of a processing capability check applied to the system of Figure 1.

5 In the following examples, a system supporting the above-mentioned VRML standard for describing virtual environments and embodying the present invention for texture mapping in the generation of two-dimensional images of such environments will be described. It will be recognised, however, that conformance with the VRML standard is neither an essential nor a limiting feature of the present invention.

10 Figure 1 is a block schematic diagram of a user apparatus, such as a personal computer (PC) 10, for accessing a virtual environment via connection to a data network 12 - for example the Internet/World Wide Web, with the virtual environment being provided by a remote service provider 14. The data 15 16 defining the appearance, structure and behaviour of the virtual environment in conformance with the VRML standard is accessed by the user sending a request message to the service provider VRML store, as identified by a unique URL (uniform resource locator). Also provided by the service provider is a source 18 of control and operational instructions for implementing operational features of the virtual environment. These instructions, preferably as segments of a virtual machine code (such as the Java ® virtual machine language developed by Sun Microsystems Inc) for general system flexibility, are accessed by the users system via a further URL, as will be described below.

20 The users system 10 comprises a main processor 20 coupled via address and data bus 22 to a random-access memory (RAM) 24, such as a hard disk, and read-only memory (ROM) 26. Also connected via the bus 22 are one or more user input devices 28, such as a keyboard and mouse or joystick, and an interface 30 to the network 12. The users system is configured, via an operating program loaded from ROM 26, as a network browser with the network interface configured according to the type of data transfer supported by the users system: for a home user, the network link is

25 30

likely to be via telephone line and accordingly the interface will incorporate a modem, controlled from the main processor 20.

Further details of the above described features of the users system will be familiar to the skilled practitioner and will not be further discussed herein, unless relevant to, or illustrative of, the operation of the present invention. It will be understood that the user apparatus need not be a PC; consumer systems specialising in network access/browsing (but otherwise of limited capability) such as the Philips Magnavox WebTV® and similar systems may embody the present invention.

The generation of images of the virtual environment from the data obtained via the network 12 is handled by a graphics processor 32 and texture management stage 34, both of which are coupled to receive input data via the address and data bus 22. The texture management stage 34, generating texels using parameterised procedural texture specifications, supplies the texture to be applied by the graphics processor 32 to the polygonal image primitives making up the image of the virtual environment. The generated images, assembled in a frame buffer 36, are finally output to a display device 38, such as a computer monitor.

The general procedure implemented by the system of Figure 1 in obtaining data from the service provider and generating images of the virtual environment will now be described with reference to the flow chart of Figure 2. As indicated previously, the first step 201 is for the system to contact the service provider and request downloading of the data defining the virtual environment in accordance with the VRML specification. Nested within the VRML data supplied by the service provider will be pointers to further locations (in the form of further URLs) from which the required specification of the procedural data required for rendering the VRML scene may be obtained. Consequently, the next step 202 of the procedure is to identify and extract these texture URLs from the received VRML data stream.

Having obtained the texture URL, or more preferably a sequence of URLs identifying a preferred and a number of alternative sources for the

information, the user's system (at step 203) will sequentially attempt to contact the URLs listed to obtain the procedural texture data until it is successful. It should be noted that the way in which the user's system is configured as a browser differs slightly with respect to conventional web browsers in that, on contacting a site identified by URL to obtain texture data, a conventional browser would be seeking to obtain a texture map or image whereas the browser embodying the present invention will be requesting the supply of machine code segments held at these sites. These machine code segments will suitably be in a machine-independent form such as the above mentioned Java® virtual code.

Having successfully contacted a site capable of supplying the machine-independent code segments specifying the required procedural texture or textures, the user's system receives from this source a short code segment (at step 204) referred to as a code skeleton. The function of the code skeleton is to cause the user's system to request from the source the texture-specifying data in a form most suited to the texture data processing capability of the user's system. A more detailed description of the implementation of this skeleton will be given hereinafter with reference to the flow chart of Figure 5.

Continuing with Figure 2, having obtained the procedural texture specifications from the remote source, and translated them as necessary from the machine-independent code form to the local machine code of the user's system, the generation of the textured image commences at step 205 with the execution of the procedural textural specifications (via texture generation stage 34; Figure 1) such as to obtain, at step 206, the required texels for mapping at the resolution required. While this is occurring, the VRML data received is parsed and processed, at step 207 (in graphics engine 32; Figure 1), to generate a model of the virtual environment and its behaviour, including identifying the various surfaces to be textured and their associated scale and/or depth value, such as to determine the required resolution for the texture pattern to be mapped. The final stage, at step 208, combines the generated texture and polygonal image data defining the virtual environment and rendering a two-

dimensional image thereof into the frame buffer (36; Figure 1) for subsequent display.

An example of a procedural texture that may be applied is the blending operator. The blend operation calculates output texels by means of the following formula:

$$\text{output} = \alpha * t_0 + (1 - \alpha) * t_1$$

where α , t_0 to t_1 are programmable constants or are obtained from one or more textures from the standardised set of procedural textures.

As an example of the application of this blend operation, if t_0 is obtained from a procedural texture for marble, if α is obtained from a procedural texture that defines a brick wall with value 1 for the bricks and value 0 for the mortar between bricks, and if t_1 is a constant specifying the color of the mortar, then the blend operation will result in a marbled brick wall.

This operation can of course be used for calculating many components of the output texels: not only for the color components red, green and blue, but if desired also for the diffuseness and glossiness parameters (as input for illumination calculations), and for small surface displacements (as inputs for bump mapping) for example.

Figures 3 and 4 illustrate two alternative configurations for the texture generation circuit 34 of Figure 1 each of which may suitably be implemented as a single semiconductor chip device. In the first embodiment, of Figure 3, the bulk of device comprises a limited instruction set processor 40 having the capability to run the machine code segments that specify the various procedural textures of a predetermined standard set, but with little other capability such as to maximise the efficiency in generation of the procedural textures. In the arrangement shown, a small non-volatile memory 42 is provided to hold the limited operating system for the processor 40 for fast initialisation of the texture processor 34 on boot-up or initialisation of the system. In an alternative arrangement (not shown), memory 42 may be omitted, with the processor operating system being loaded up from system ROM (26; Figure 1).

In addition to an input 44 for the machine code segments (from bus 22; Figure 1) the texture processor of Figure 3 has additional inputs 46 for a number of parameters including a depth value. This depth value represents the apparent depth, and suitably also orientation, of the polygonal surface onto which the texture to be generated is to be mapped. This depth value will provide an indication of the polygon "footprint" when translated to two-dimensional screen space and hence will have a direct bearing on the resolution at which the texture is to be generated, such that the output texels generated (on line 48) will not need scaling before being mapped directly onto a polygonal surface.

An alternative configuration for the texture processor 34' is shown in Figure 4. Here it is assumed that the processor 50, whilst still having an operating system capability to handle all procedural textures specified in the above mentioned standardised set, is a more general device. Here, rather than generating texels to order at a given scale, the processor generates a texture map (or map segment) into an associated cache memory 52 suitably at two or more levels of resolution. From these different levels of resolution, interpolator stage 54, in response to receipt of the polygon depth signal generates texels for display at the desired resolution. Whilst the configuration of Figure 4 is not as efficient as that of Figure 3, due to the lack of a specialised processor and the need to generate texture maps and then interpolate, it is a much faster option than, say, calling for texture maps to be downloaded from system storage (such as the user system hard disk) due to the proximity of processor 50 and cache 52.

Turning now to the flow chart of Figure 5, this schematically represents both the operational features and results of implementation of the skeleton code sent by a source of procedural texture specification codes to identify the texture processing capability of the requesting system. The procedure begins at step 501 with a direction for the user's system to identify its texture processing capability, preferably by use of short code words indicating predetermined types. The first check, at step 502, is whether the processor is

a limited instruction set processor dedicated to the standardised set of procedural textures, as with the processor of Figure 3. If the user system does have such a texture processor, the user system can proceed to obtain the procedural texture codes and any associated scaling factors (at step 503) and subsequently (at step 504) generate on demand texels of the pattern required and to the scale desired.

If the check at step 502 is negative, that is to say the texture processor is not based on a limited instruction set processor, the next check at step 505 is to whether the texture processor has an onboard cache memory, as in the embodiment of Figure 4. If this is the case, then, at step 506, the machine code segments specifying the procedural texture may again be obtained and implemented by the processor (50; Figure 4) such as to generate one or more texture maps into the cache at step 507. Having determined (at step 508) the depth of the polygon surface to be textured with reference to a specified texture resolution for that polygon, the extent to which the texture for the polygon needs to be scaled up or down may be determined (at step 508). From the data in the cache an interpolator may then generate texture to the required resolution (step 509).

If the checks of both steps 502 and 505 are negative, the next step (510) is to determine whether the texture handling circuitry of the user system has any capacity for handling of procedural textures (perhaps implemented in the main system CPU rather than a dedicated texture processor). If there is a procedural capacity, the system will again proceed to obtain the code segments specifying the textures to be mapped at step 511 and to generate one or more resolutions of texture map at step 512. In this instance, without benefit of an on-chip cache the more lengthy process of storing the generated texture maps in RAM has to be gone through (at step 513). In order to generate texels for mapping, data from the generated and stored texture maps must be read from the RAM (step 514) and interpolated as required (step 515) in order to generate the necessary texels at the correct resolution.

The remaining stages of the procedure are in the form of a fail-safe

measure if checks 502, 505 and 510 are negative (that is to say the user system has no capability for procedural texture in any form). In the absence of procedural texture capability, a check is made (step 516) to determine whether the user system has any capability for the storage of texture maps and, if so, these will be called (step 517) from their remote source and downloaded via the data network to be stored in the system RAM on receipt.

The final step, should even the check of step 516 prove negative, is to use a single texture value for all surfaces to be textured (step 518): for example, all surfaces to be textured may appear as colored purple.

From reading the present disclosure, other modifications will be apparent to persons skilled in the art. Such modifications may involve other features which are already known in the design, manufacture and use of image processing apparatus and devices and component parts thereof and which may be used instead of or in addition to features already described herein. Although claims have been formulated in this application to particular combinations of features, it should be understood that the scope of the disclosure of the present application also includes any novel feature or novel combination of features disclosed herein either explicitly or implicitly or any generalisation thereof, whether or not it relates to the same invention as presently claimed in any claim and whether or not it mitigates any or all of the same technical problems as does the present invention. The applicants hereby give notice that new claims may be formulated to such features and/or combinations of such features during the prosecution of the present application or of any further application derived therefrom.

CLAIMS

1. Apparatus for texture mapping in a computer graphics system, using a predetermined set of standardised textures, the apparatus having an input to receive data identifying one of the set of standardised textures, and means for processing the data to generate output texels of the identified texture; characterised in that each texture of the standardised set is a procedural texture, the input identifying data comprises one or a sequence of program commands the execution of which will result in the generation of a respective procedural texture, with the means for processing data comprising a processor operable to implement all such input program commands or sequences of input programme commands as required to generate the procedural textures of the standardised set.

2. Apparatus as claimed in Claim 1, having at least one further input for one or more predetermined classes of numerical parameter, with the processor being arranged to generate procedural textures with reference to the or each numerical parameter value received.

3. Apparatus as claimed in Claim 1, having at least one further input for a scale factor, with the processor being arranged to generate a procedural texture at a resolution determined by a received scale factor.

4. Apparatus as claimed in Claim 1, wherein the processor is operable to implement only such input program commands or sequences of input programme commands as required to generate those procedural textures of the standardised set.

5. Apparatus as claimed in Claim 1, further comprising a cache memory coupled with the processor, with the processor being configured to generate said procedural textures as texture maps within said cache.

6. Apparatus as claimed in Claim 5, further comprising an input to receive a scale factor, and an interpolator to generate output texels from texture map entries in the cache at a resolution determined by the received scale factor.

5

7. A semiconductor chip comprising a texture mapping apparatus as claimed in Claim 4 on a single substrate.

8. A semiconductor chip comprising a texture mapping apparatus as claimed in Claim 6, with the processor, cache and interpolator on a common substrate.

10

9. A computer graphics system including an apparatus as claimed in Claim 1, together with a source of three-dimensional polygon data, a geometry processor coupled to receive said polygon data and arranged to generate a two-dimensional representation of said polygons, a source of program commands coupled to the input of the texture mapping apparatus and specifying textures to be applied to respective ones of said polygons, and rendering means coupled to receive the outputs of the geometry processor and texture mapping apparatus and arranged to generate an output image of said polygons with texture applied.

15

20

10. A computer graphics system as claimed in Claim 9, wherein the sources of polygon data and program commands comprise an interface to a data network to which are coupled remote sources of such polygon data and program commands, the interface being coupled with a memory holding a store of network addresses for such remote sources and being operable to format and transmit messages to such addresses calling for the polygon data and program commands.

25

30

11. A computer graphics system as claimed in Claim 10, wherein said

program commands are transmitted over the network in virtual machine code and the system further comprises means for conversion of the same to a local machine code supported by the processor.

ABSTRACT

GRAPHIC IMAGE TEXTURE GENERATION

5 An apparatus (34) for texture mapping in a computer graphics system,
using a predetermined set of standardised textures. Each texture of the
standardised set is a procedural texture, and is supplied to the apparatus (34)
as one or a sequence of program commands (44) the execution of which will
result in the generation of the respective procedural texture. In a preferred
10 embodiment, the means for processing the program commands (4) comprises
a processor operable to implement only those input program commands or
sequences of input programme commands as are required to generate the
procedural textures of the standardised set.

15
[Figure 3]

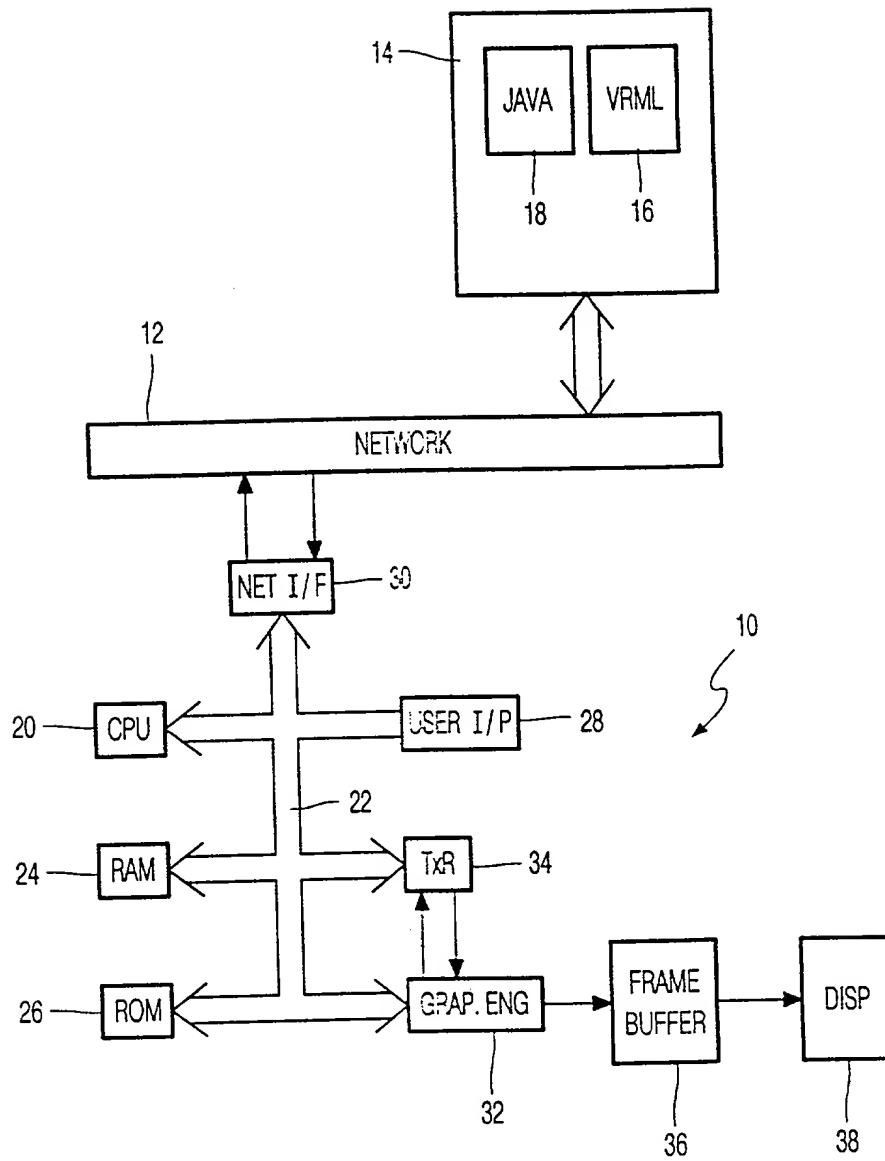


FIG. 1

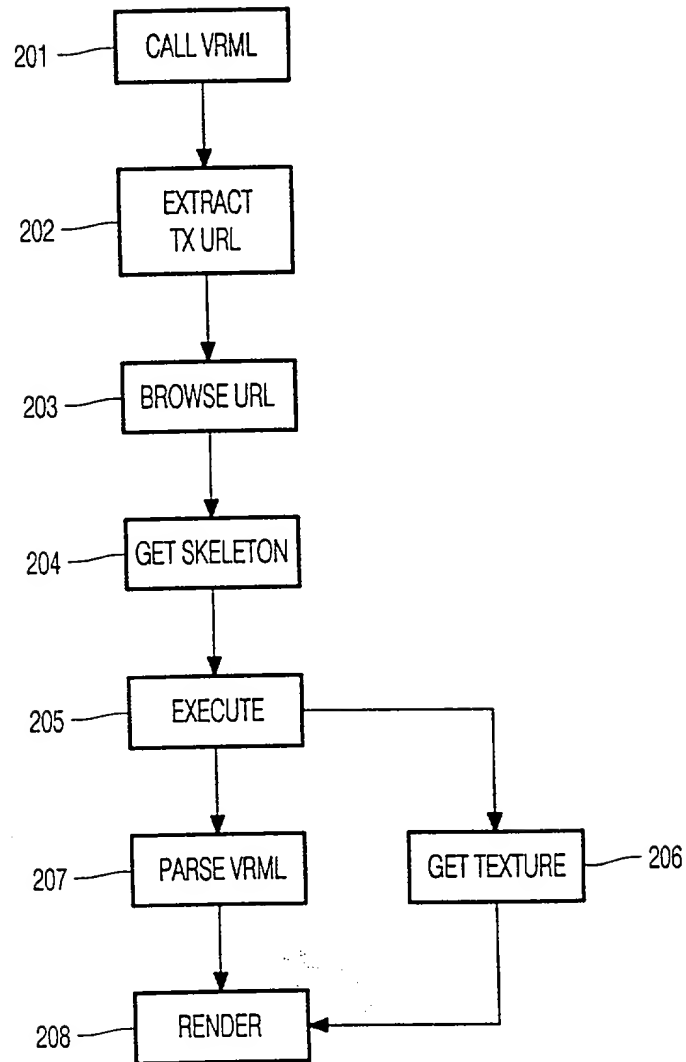


FIG. 2

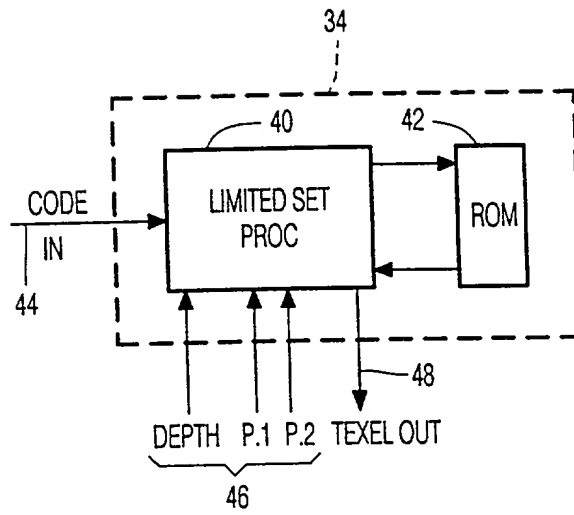


FIG. 3

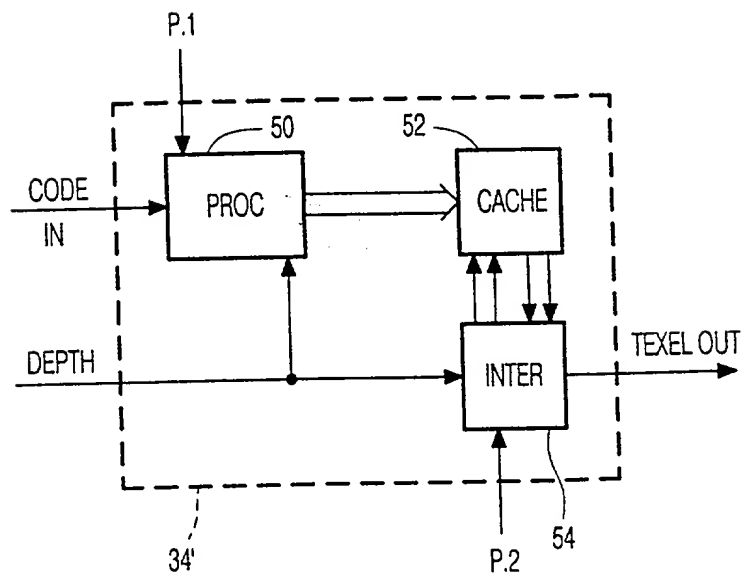


FIG. 4

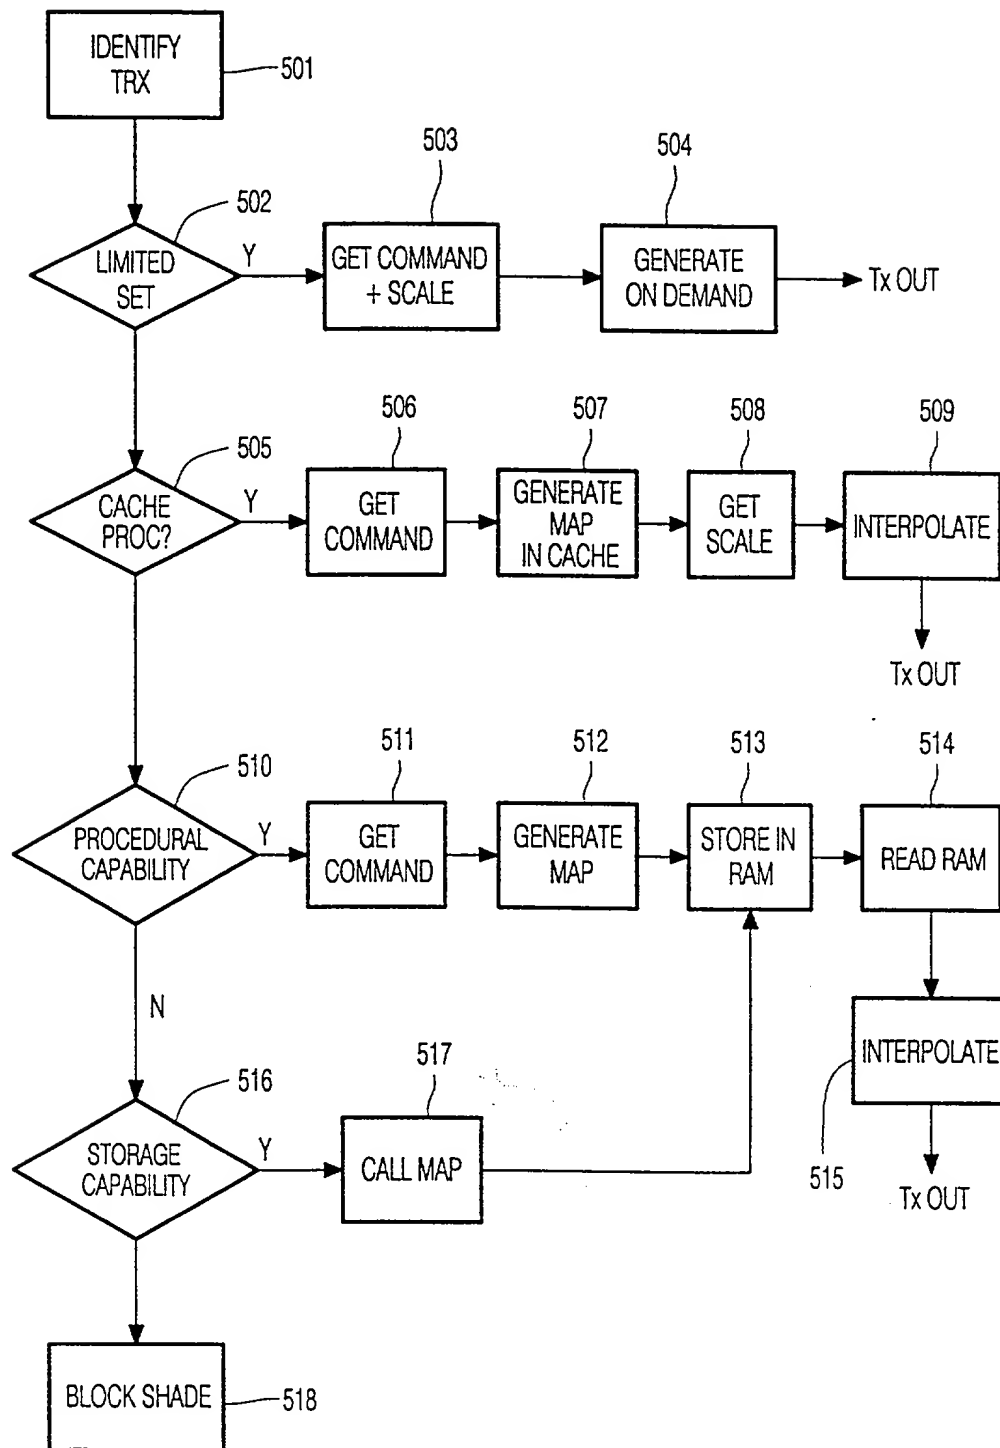


FIG. 5

DECLARATION AND POWER OF ATTORNEY

Sole/Joint

Attorney's Docket No:

PHB34169US

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

GRAPHIC IMAGE TEXTURE GENERATION

the specification of which (check one)



is attached hereto



was filed on as Application Serial No: and was amended on

(if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56 (a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

PRIOR FOREIGN APPLICATION(S)

COUNTRY	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY Claimed Under 35 U.S.C. 119
GREAT BRITAIN	9715005.6	17-07-1997	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>
			Yes <input type="checkbox"/> No <input type="checkbox"/>

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35 United States Code §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

PRIOR UNITED STATES APPLICATION(S)

APPLICATION SERIAL NUMBER	FILING DATE	STATUS (PATENTED, PENDING, ABANDONED)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Jack E. Haken, Reg. No 26,902

Algy Tamoshunas, Reg. No 27,677

SEND CORRESPONDENCE TO: Corporate Patent Counsel U.S. Philips Corporation 580 White Plains Road Tarrytown, New York 10591	DIRECT TELEPHONE CALLS TO: (Name and telephone number) Gregory L. Thorne (914) 333-9665
---	--

Dated:		Inventor's Signature:	
FULL NAME OF INVENTOR:	Last name WOOD	First Name: Karl	Middle Name: J.
RESIDENCE & CITIZENSHIP	City CRAWLEY	State or Foreign Country: GREAT BRITAIN	Country of Citizenship: GREAT BRITAIN
POST OFFICE ADDRESS	Street & No: 11 BYERLEY WAY	City: CRAWLEY, WEST SUSSEX	State or Country: U.K. Zip Code: RH10 7YU

Dated:		Inventor's Signature:	
FULL NAME OF INVENTOR:	Last name VAN OVERVELD	First Name: Cornelis	Middle Name: W.A.M.
RESIDENCE & CITIZENSHIP	City EINDHOVEN	State or Foreign Country: THE NETHERLANDS	Country of Citizenship: THE NETHERLANDS
POST OFFICE ADDRESS	Street & No: SERLIOWEG 14	City: EINDHOVEN	State or Country: NL Zip Code: 5624 KA

Dated:		Inventor's Signature:		
FULL NAME OF INVENTOR	Last name DIJKSTRA	First Name: Hendrik	Middle Name:	
RESIDENCE & CITIZENSHIP	City EINDHOVEN	State or Foreign Country: THE NETHERLANDS	Country of Citizenship: THE NETHERLANDS	
POST OFFICE ADDRESS	Street & No BAKHUIZEN VAN DER BRINKLAAN 43	City: EINDHOVEN	State or Country: NL	Zip Code: 5624 GM

Dated:		Inventor's Signature:		
FULL NAME OF INVENTOR	Last name PATTERSON	First Name: Douglas	Middle Name: R.M.	
RESIDENCE & CITIZENSHIP	City CAMBRIDGE	State or Foreign Country: GREAT BRITAIN	Country of Citizenship: GREAT BRIATIN	
POST OFFICE ADDRESS	Street & No: FLAT 4, EIGHTS MARINA	City: MARINA'S WAY, CAMBRIDGE	State or Country: U.K.	Zip Code: CB4 1AZ

Dated:		Inventor's Signature:		
FULL NAME OF INVENTOR	Last name	First Name:	Middle Name:	
RESIDENCE & CITIZENSHIP	City	State or Foreign Country:	Country of Citizenship:	
POST OFFICE ADDRESS	Street & No:	City:	State or Country:	Zip Code:

Dated:		Inventor's Signature:		
FULL NAME OF INVENTOR	Last name	First Name:	Middle Name:	
RESIDENCE & CITIZENSHIP	City	State or Foreign Country:	Country of Citizenship:	
POST OFFICE ADDRESS	Street & No:	City:	State or Country:	Zip Code:

Dated:		Inventor's Signature:		
FULL NAME OF INVENTOR	Last name	First Name:	Middle Name:	
RESIDENCE & CITIZENSHIP	City	State or Foreign Country:	Country of Citizenship:	
POST OFFICE ADDRESS	Street & No:	City:	State or Country:	Zip Code:

Dated:		Inventor's Signature:		
FULL NAME OF INVENTOR	Last name	First Name:	Middle Name:	
RESIDENCE & CITIZENSHIP	City	State or Foreign Country:	Country of Citizenship:	
POST OFFICE ADDRESS	Street & No:	City:	State or Country:	Zip Code:

Dated:		Inventor's Signature:		
FULL NAME OF INVENTOR	Last name	First Name:	Middle Name:	
RESIDENCE & CITIZENSHIP	City	State or Foreign Country:	Country of Citizenship:	
POST OFFICE ADDRESS	Street & No:	City:	State or Country:	Zip Code:

Dated:		Inventor's Signature:		
FULL NAME OF INVENTOR	Last name	First Name:	Middle Name:	
RESIDENCE & CITIZENSHIP	City	State or Foreign Country:	Country of Citizenship:	
POST OFFICE ADDRESS	Street & No:	City:	State or Country:	Zip Code:

Dated:		Inventor's Signature:		
FULL NAME OF INVENTOR	Last name	First Name:	Middle Name:	
RESIDENCE & CITIZENSHIP	City	State or Foreign Country:	Country of Citizenship:	
POST OFFICE ADDRESS	Street & No:	City:	State or Country:	Zip Code: